


## B360 Pro FULLY RUGGED LAPTOP



- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- Optional NVIDIA® Quadro® RTX A500 4GB discrete graphic controller
- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 13.3" FHD LumiBond display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport battery swappable technology



B360 Pro 3D demo

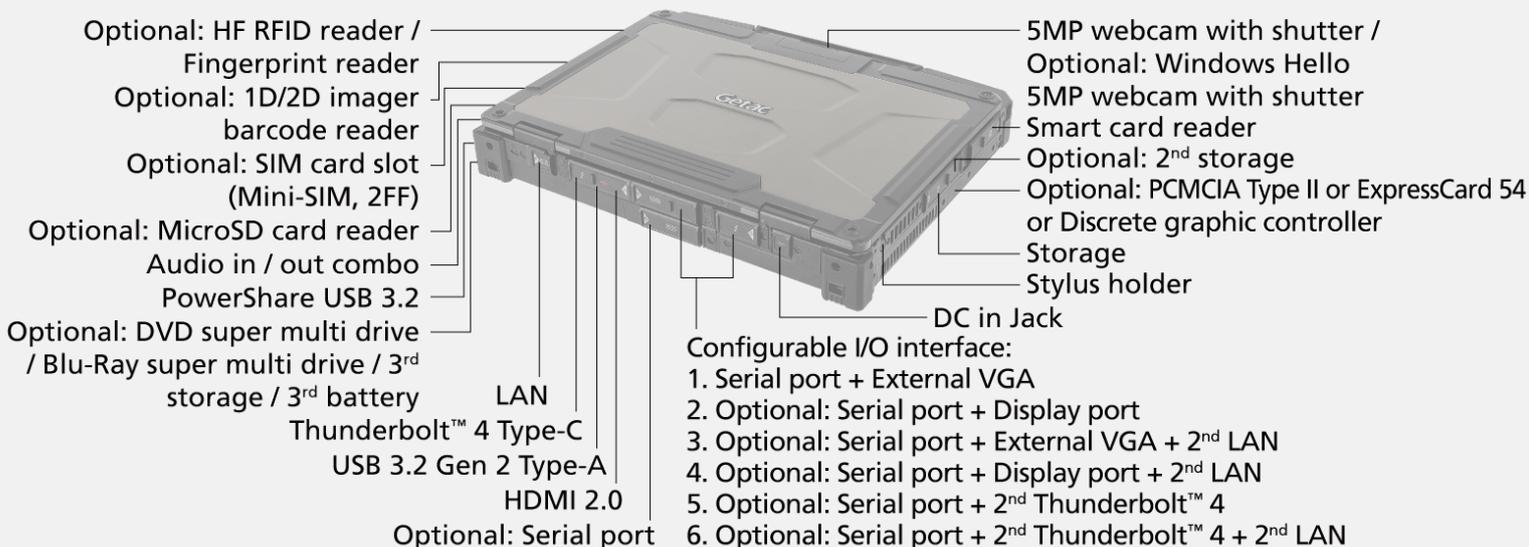

# SPECIFICATIONS

## Generation

G3

## Operating System

Windows 11 Pro

## Mobile Computing Platform

Intel® Core™ Ultra 5 processor 225H  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

### Platform options:

Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise  
Max. 5.0GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H

Max. 5.1GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise

Max. 5.3GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache

## Graphics

Intel® Arc™ Graphics 1

Optional: NVIDIA® Quadro®

RTX A500 4GB discrete graphic controller <sup>ii,iii</sup>

## NPU

Intel® AI Boost

## Display

13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)  
Protection film

1,400 nits LumiBond display with  
Getac sunlight readable technology  
Capacitive multi-touch screen

## Storage & Memory

16GB DDR5

Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD

Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2<sup>nd</sup> storage <sup>iv</sup>:

256GB / 512GB / 1TB / 2TB PCIe NVMe SSD  
Optional multimedia bay storage : 1TB / 2TB SATA SSD

## Keyboard

LED backlit membrane keyboard

## Pointing Device

Touchscreen

- Capacitive multi-touch screen

Touchpad

- Touchpad with two buttons

## Audio

Integrated stereo speakers

Integrated dual-array microphone

## Expansion Slot

Smart card reader x 1

Optional: Micro SD card reader x 1

Optional: Discrete graphics controller, or PCMCIA Type II,  
or ExpressCard 54

Optional: 1D/2D imager barcode reader

## Multimedia Bay

Configurable options <sup>v,vi</sup> :

1. Optional: DVD super multi drive, or Blu-Ray super multi drive,  
or 3<sup>rd</sup> storage

2. Optional: 3<sup>rd</sup> battery

## I/O Interface

5MP webcam x 1 <sup>vii</sup>

Audio in/out combo x 1

DC in Jack x 1

PowerShare USB 3.2 x 1

USB 3.2 Gen 2 Type-A x 1

Thunderbolt™ 4 Type-C x 1 <sup>viii</sup>

LAN (RJ45) x 1

HDMI 2.0 x 1

Docking connector x 1

Optional: SIM card slot x 1 (Mini-SIM, 2FF) <sup>ix</sup>

Optional: Windows Hello face-authentication

SMP camera (front-facing) x 1 <sup>x</sup>

Optional: RF antenna pass-through for GPS, WWAN and WLAN

### Configurable I/O options <sup>x</sup>:

1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1

2. Serial port (9-pin; D-sub) x 1 + Display port x 1

3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1

+ 2<sup>nd</sup> LAN (RJ45) x 1

4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2<sup>nd</sup> LAN (RJ45) x 1

5. Serial port (9-pin; D-sub) x 1 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1

6. Serial port (9-pin; D-sub) x 1 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1

+ 2<sup>nd</sup> LAN (RJ45) x 1

7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1

8. Serial port (9-pin; D-sub) x 2 + Display port x 1

9. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1

+ 2<sup>nd</sup> LAN (RJ45) x 1

10. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2<sup>nd</sup> LAN (RJ45) x 1

11. Serial port (9-pin; D-sub) x 2 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1

12. Serial port (9-pin; D-sub) x 2 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1

+ 2<sup>nd</sup> LAN (RJ45) x 1

## Communication Interface

10/100/1000 base-T Ethernet

Intel® Wi-Fi 7 BE200, 802.11be

Bluetooth (v5.4) <sup>xi</sup>

Optional: Dedicated GPS with L1/L5 <sup>xii</sup>

Optional: 4G LTE mobile broadband with integrated GPS <sup>xiii, xiv, xv</sup>

Optional: 5G Sub-6 with integrated GPS <sup>xiii, xiv, xv</sup>

Optional: Dual SIM (Mini-SIM 2FF and e-SIM) <sup>ix, xv</sup>

## Security Feature

TPM 2.0

Kensington lock

Smart card reader

Getac Disk Wipe

Optional: Fingerprint reader <sup>xvi</sup>

Optional: HF RFID reader <sup>xvii, xviii</sup>

Optional: Absolute Persistence®

## Power

AC adapter (90W, 100-240VAC, 50/60Hz)

AC adapter (120W, 100-240VAC, 50/60Hz) <sup>ii</sup>

High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) x 2

Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 2080mAh) x 1

LifeSupport battery swappable technology

## Dimension (W x D x H) & Weight

342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")

3.08kg (6.79lbs) <sup>xix</sup>

## Rugged Feature

MIL-STD-810H certified

IP66 certified

MIL-STD-461G certified <sup>xxii</sup>

Vibration & 6ft (1.8m) drop resistant

Optional: ANS/JUL 121201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D) <sup>xxk</sup>

Optional: Salt fog certified

## Environmental Specification

Temperature <sup>xx</sup>:

- Operating: -29°C to 63°C / -20°F to 145°F <sup>xxi</sup>

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

## Pre-installed Software

Getac Utility

Getac Geolocation

Getac Barcode Manager <sup>xxiii</sup>

Optional: Absolute Secure Endpoint

Optional: Absolute Secure Access

## Optional Software

Getac Driving Safety Utility

Getac VGPS Utility <sup>xxiiii</sup>

## Accessories

High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)

AC adapter (90W, 100-240VAC)

Capacitive stylus with tether

### Optional:

Carry bag

High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (90W, 100-240VAC) <sup>ii</sup>

AC adapter (120W, 100-240VAC) <sup>ii</sup>

MIL-STD-461 AC adapter (90W, 100-240VAC)

DC-DC vehicle adapter (120W, 11-32VDC)

Capacitive stylus with tether

Protection film

Vehicle cradle <sup>xxv</sup>

Vehicle dock <sup>xxvi</sup>

Office dock

Spare SSD kit

100W Type-C adapter <sup>xxvii</sup>

## Bumper-to-Bumper Warranty

Accidents can take your equipment out of service

when you least expect it, especially in a rugged

environment, which can cause costly equipment

downtime.

That is why Getac has introduced accidental

damage as standard under our

Bumper-to-Bumper warranty, to help minimize

your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee.

That means you can depend on us to have your

unit back in service within days.

## Standard

3 years Bumper-to-Bumper

# B360 Pro FULLY RUGGED LAPTOP

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- III. Discrete graphics card, PCMCIA slot, and ExpressCard slot are mutually exclusive.
- IV. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- V. Option 1 and 2 are mutually exclusive.
- VI. Factory option. Not user swappable.
- VII. SMP webcam and optional Windows Hello face-authentication SMP camera (front-facing) are mutually exclusive options.
- VIII. The configuration with a discrete graphic controller does not support USB-C power delivery function.
- IX. Units with 4G/5G option come with an embedded SIM card slot.
- X. External VGA, Display port, and 2<sup>nd</sup> Thunderbolt™ 4 Type-C are mutually exclusive.
- XI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices; users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- XII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- XIII. Only available in the US, UK, EU, Australia, and New Zealand.
- XIV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XV. Fingerprint reader and HF RFID reader are mutually exclusive.
- XVI. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FelICa™ compliant).
- XVII. Weight and dimensions vary from configurations and optional accessories.
- XVIII. MIL-STD-461 90W AC adapter sold separately.
- XIX. Available with limited configurations and environment conditions.
- XX. Tested by an independent third-party test lab following MIL-STD-810H.
- XXI. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XXII. Available when barcode reader option is selected.
- XXIII. Models require either embedded or standalone GPS module.
- XXIV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XXV. Do not support the configurations with discrete graphics card.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	1	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

# Getac



Getac USA

15495 Sand Canyon Ave. Suite 350 Irvine,  
CA 92618 Tel : 949-681-2900  
GetacSales\_US@getac.com |  
www.getac.com/us/

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.